


Screw-in Tools for Test Probes

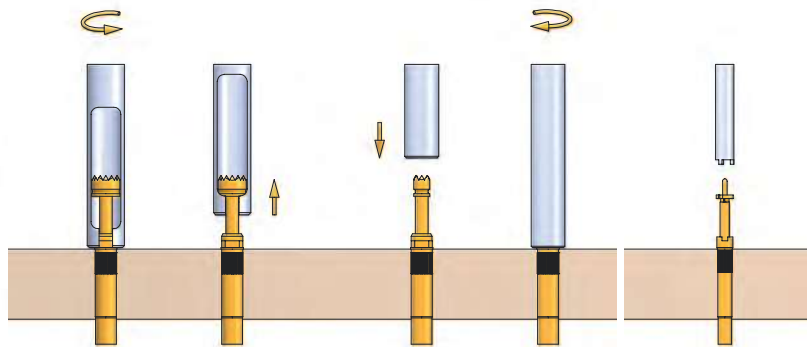

Torque screwdriver

Bit insert for barrel with spanner flat

Bit insert for interlocking connection

Test probe (GKS) screw in and unscrew

DW-x-S (DW-x)	BIT-GKS M BIT-GKS-xxx M-B	BIT-T-xxx M
<p>Torque screwdriver to screw GKS into KS.</p> <p>Pre-adjusted torque screw drivers are available in 1, 3.5 and 20 cNm versions.</p> <p>Adjustable Torque screw drivers available in 5-40 and 20-120 cNm.</p>	<p>Bit insert to screw GKS into KS.</p> <p>BIT-GKS-xxx M are the standard tools for GKS, especially when the head-Ø ≥ spanner flat width on probe.</p> <p>BITGKS- xxx M-B are for GKS with head-Ø ≤ spanner flat width on probe. Especially for installing GKS with limited pitch distance (small grid).</p>	<p>Bit insert to screw step probe into KS. The screw-in torque is transmitted using an interlocking connection.</p>

Tools

KS installation and removal

SW-KS-xxx	196
SW-GKS	196
SW-KS-xxx-G	196 NEW
AW-KS-Set-ICT / CABLE	196

GKS installation and removal

SW-GKS-xxx	196
SW-GKS	196
SW-ZW-GKS-xxx	196

GKS screw-in and unscrew

DW-x-S	197 - 198
DW-x	197 - 198
BIT-GKS-xxx M	197 - 198
BIT-GKS-xxx M-B	197 - 198
BIT-T-xxx M	197 - 198

Note::
See next page for overview and comparison table.